


CABLE GROUP	CABLE	OUTER JACKET	BRAID (#1)	DIELEC. (#1)	BRAID (#2)	DIELEC. (#2)	CENTER COND.
00	NONE	--	--	--	--	--	--
01	RG316, 179, 174, 187, 188, LMR100	.110 [2.79]	.088 [2.24]	.063 [1.60]	--	--	.020 [0.51]
02	HARTING 401.01.01	.140 [3.56]	.107 [2.72]	.070 [1.78]	--	--	.025 [0.64]
03	RG405 (.086)	.086 [2.18]	--	.066 [1.68]	--	--	.020 [0.51]
04	RG402 (.141)	.141 [3.58]	--	.118 [3.00]	--	--	.036 [0.91]
05	RD316, 179, 174, 187, 188	.118 [3.00]	.096 [2.44]	.063 [1.60]	--	--	.020 [0.51]
06	RG178, 196	.080 [2.03]	.054 [1.37]	.034 [0.86]	--	--	.012 [0.30]
07	RD178, 196	.110 [2.79]	.074 [1.88]	.034 [0.86]	--	--	.012 [0.30]
08	RD180, 195	.155 [3.94]	.124 [3.15]	.102 [2.59]	--	--	.012 [0.30]
09	RG58, 141, 303, LMR 195	.195 [4.95]	.150 [3.81]	.116 [2.95]	--	--	.037 [0.94]
10	RG55, 142, 223, 400	.216 [5.49]	.176 [4.47]	.116 [2.95]	--	--	.0385 [0.98]
11	M17/151 (.047 S/R)	.047 [1.19]	--	.037 [0.94]	--	--	.012 [0.30]
12	RG9A/U	.425 [10.80]	.360 [9.14]	.285 [7.24]	--	--	.089 [2.26]
13	RG122/U	.160 [4.06]	.126 [3.20]	.096 [2.44]	--	--	.031 [0.79]
14	RG303/U	.170 [4.32]	.146 [3.71]	.116 [2.95]	--	--	.037 [0.94]
15	LMR 200	.195 [4.95]	.144 [3.66]	.116 [2.95]	--	--	.044 [1.12]
16	75 OHM SPECIAL (H/S: 11BNC 75-2-32)	TBD	TBD	TBD	TBD	TBD	TBD
17	RG403	.120 [3.05]	.100 [2.54]	.075 [1.91]	.050 [1.27]	.035 [0.89]	.010 [0.25]
18	H/S G02330HT	.210 [5.33]	.150 [3.81]	.125 [3.18]	.090 [2.29]	NOTE 1	.020 [0.51]
19	TRIAx SPECIAL (BLACK)	TBD	TBD	TBD	TBD	TBD	TBD
20	BELDEN #9222	TBD	TBD	TBD	TBD	TBD	TBD
21	RG59, RG62	.242 [6.15]	.191 [4.85]	.146 [3.71]	--	--	.025 [0.64]
22	RG401 (.250 S/R)	.250 [6.35]	--	.210 [5.33]	--	--	.064 [1.63]
23	734A (AT&T)	TBD	TBD	TBD	TBD	TBD	TBD
24	735A (AT&T)	.121 [3.07]	.101 [2.57]	.062 [1.57]	--	--	.012 [0.30]
25	LMR 400	.405 [10.29]	.320 [8.13]	.285 [7.24]	--	--	.109 [2.77]
26	BT3002 (75 OHM)	.140 [3.56]	--	.077 [1.96]	--	--	.012 [0.30]
27	LMR 240	.240 [6.10]	.178 [4.52]	.150 [3.81]	--	--	.056 [1.42]
28	OSMT SPECIAL (M/A COM - AMP)	.075 [1.91]	--	.028 [0.71]	--	--	.010 [0.25]
29	VMTX (50 OHM)	.046 [1.17]	.034 [0.86]	.0205 [0.52]	--	--	.008 [0.20]

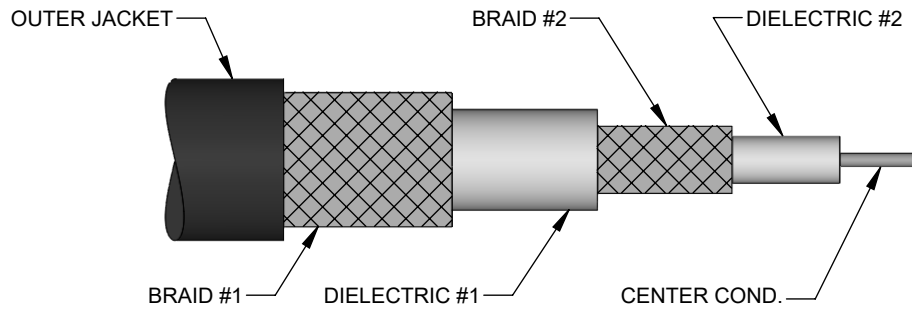

CABLE GROUP	CABLE	OUTER JACKET	BRAID (#1)	DIELEC. (#1)	BRAID (#2)	DIELEC. (#2)	CENTER COND.
30	VMTX (75 OHM)	.048 [1.22]	.0305 [0.77]	.0225 [0.57]	--	--	.004 [0.10]
31	RG217	.545 [13.84]	.463 [11.76]	.370 [9.40]	--	--	.106 [2.69]
32	COAXCO 1102	.140 [3.56]	.117 [2.97]	.100 [2.54]	.080 [2.03]	.063 [1.60]	.024 [0.61]
33	RG307	.270 [6.86]	.237 [6.02]	.205 [5.21]	.176 [4.47]	.146 [3.71]	.029 [0.74]
34	RG8, 213	.405 [10.29]	.340 [8.64]	.285 [7.24]	--	--	.089 [2.26]
35	TENSOLITE #26453/03128X-2 (LD)	SEE TENSOLITE SPEC. (TWINAX CABLE)					
36	M22931/11-003 (RG254)	1.093 [27.8]	.953 [24.2]	--	--	--	.311 [7.9]
37	CUSTOMER SPECIAL	.435 [11.05]	.400 [10.16]	.360 [9.14]	--	--	.133 [3.38]
38	CUSTOMER SPECIAL	.053 [1.35]	TBD	TBD	TBD	TBD	TBD
39	CUSTOMER SPECIAL	TBD	TBD	TBD	TBD	TBD	TBD
40	RG108 (78 OHM TWINAX CABLE)	.235 [5.97]	.177 [4.50]	TBD	TBD	.079[2.0](x2)	.038[1.0](x2)

NOTES:

1. ADDITIONAL JACKET: .075 [1.91] / DIELECTRIC #2: .059 [1.50]
2. ALL DIM'S. IN [] = MM